

Project Name:

SKU:

MODA Contact:



E-Mail:

Type:

PO #:

Quantity:

Notes:

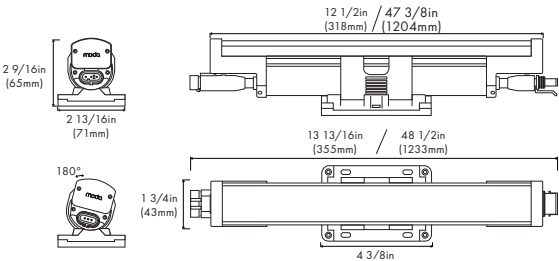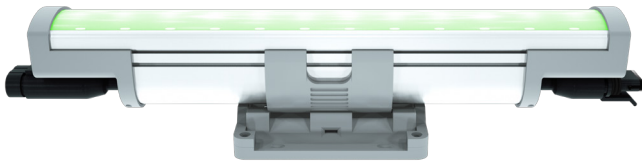

PHYSICAL

Dimensions	L: 12 1/2in (318mm)	W: 2 13/16in (71mm)
	L: 47 3/8in (1204mm)	H: 2 9/16in (65mm)
Weight	12in: 1.3lbs (0.6kg)	
	48in: 4.6lbs (2.1kg)	
Applications	Cove, Accent, & Indirect General Illumination	
Construction	Pure Aluminum Body, Polycarbonate Mounting Bracket and Polycarbonate Optical Lens	
Ingress Protection	Wet Location IP66	
Thermal Management	Moda Aluminum Heat Sink	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)	
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)	
Humidity	0-95% Non Condensing	

SPECIFICATIONS

	Lumens		Efficacy	
	1FT	4FT	1FT	4FT
HO	492 - 948	1968 - 3792	49 - 94	49 - 94
HO+	240 - 1104	958 - 4420	24 - 110	24 - 110

POWER CONSUMPTION

	120V - 277V AC	
	1FT	4FT
HO	10W	40W
HO+	10W	40W

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
HO	60ft	60ft	120ft
HO+	60ft	60ft	120ft

OUTPUT

Colors	Red, Green, Blue, Amber, Yellow, Pink, Cyan, Violet, Turquoise, Ice Blue, Light Green, Golden Yellow, Dark Blue, and Dark Orange available
Beam Angle	120°
CRI	94-98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08
Dimming Range	100%-0% flicker-free

COLOR AVAILABILITY

COLOR	HO	HO+	COLOR	HO	HO+
Red	•	•	Light Green		•
Green	•	•	Yellow		•
Blue	•	•	Golden Yellow		•
Amber	•	•	Turquoise		•
Cyan		•	Pink		•
Ice Blue		•	Violet		•

• Available

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	3 Year Limited Warranty

Due to continuous improvements and innovations, specifications may change without notice. Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

	FIXTURE	ORDERING SKU
ELV HO 1FT	Moda Cove Exterior High Output Silver ELV Dimming Amber 1FT	MCE-HO-S1-S-A-1
	Moda Cove Exterior High Output Silver ELV Dimming Blue 1FT	MCE-HO-S1-S-B-1
	Moda Cove Exterior High Output Silver ELV Dimming Green 1FT	MCE-HO-S1-S-G-1
	Moda Cove Exterior High Output Silver ELV Dimming Red 1FT	MCE-HO-S1-S-R-1
ELV HOP 1FT	Moda Cove Exterior High Output Plus Silver ELV Dimming Amber 1FT	MCE-HOP-S1-S-A-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Blue 1FT	MCE-HOP-S1-S-B-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Cyan 1FT	MCE-HOP-S1-S-C-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Golden Yellow 1FT	MCE-HOP-S1-S-GY-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Green 1FT	MCE-HOP-S1-S-G-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Ice Blue 1FT	MCE-HOP-S1-S-IB-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Light Green 1FT	MCE-HOP-S1-S-LG-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Pink 1FT	MCE-HOP-S1-S-P-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Red 1FT	MCE-HOP-S1-S-R-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Turquoise 1FT	MCE-HOP-S1-S-TQ-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Violet 1FT	MCE-HOP-S1-S-V-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Yellow 1FT	MCE-HOP-S1-S-Y-1
ELV HO 4FT	Moda Cove Exterior High Output Silver ELV Dimming Amber 4FT	MCE-HO-S1-S-A-4
	Moda Cove Exterior High Output Silver ELV Dimming Blue 4FT	MCE-HO-S1-S-B-4
	Moda Cove Exterior High Output Silver ELV Dimming Green 4FT	MCE-HO-S1-S-G-4
	Moda Cove Exterior High Output Silver ELV Dimming Red 4FT	MCE-HO-S1-S-R-4
ELV HOP 4FT	Moda Cove Exterior High Output Plus Silver ELV Dimming Amber 4FT	MCE-HOP-S1-S-A-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Blue 4FT	MCE-HOP-S1-S-B-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Cyan 4FT	MCE-HOP-S1-S-C-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Golden Yellow 4FT	MCE-HOP-S1-S-GY-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Green 4FT	MCE-HOP-S1-S-G-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Ice Blue 4FT	MCE-HOP-S1-S-IB-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Light Green 4FT	MCE-HOP-S1-S-LG-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Pink 4FT	MCE-HOP-S1-S-P-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Red 4FT	MCE-HOP-S1-S-R-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Turquoise 4FT	MCE-HOP-S1-S-TQ-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Violet 4FT	MCE-HOP-S1-S-V-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Yellow 4FT	MCE-HOP-S1-S-Y-4

ACCESSORIES	DESCRIPTION	ORDERING SKU
Leader Cable US 3 Pin 25FT	Power to first fixture of run	MLCE-US-3PIN-B-25FT
Leader Cable US 3 Pin 50FT	Power to first fixture of run	MLCE-US-3PIN-B-50FT
Jumper Cable US 3 Pin 1FT	Connection between fixtures	MJCE-US-3PIN-B-1FT
Jumper Cable US 3 Pin 4FT	Connection between fixtures	MJCE-US-3PIN-B-4FT
Terminator 3 Pin	Must be fixed to last fixture for safety	MTE-3PIN-B
Exterior Bracket Lock	Holds fixture in place for vertical installation	MCGE-BL-G

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
MODA Bridge 1 2.0 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	MODA-BRIDGE-1-S2-S	250-0000