


Client: _____ Project Name: _____

MODA Contact: _____ E-Mail: _____

SKU: _____ Type: _____ PO#: _____ Quantity: _____

Notes: _____

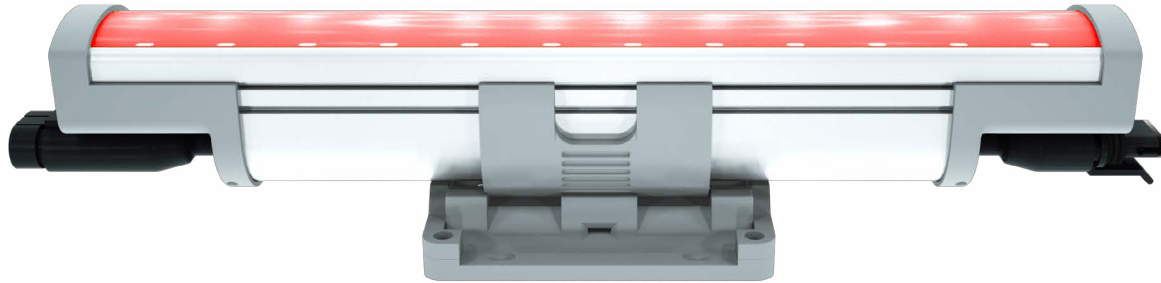

Specification Grade Premium Exterior Graze Fixture.

MODA GRAZE Exterior is a new patent pending cove lighting system designed for exterior applications. Utilizing MODA’s latest software and dimming technology with its onboard dimming chipset and MODA firmware, this series can dim to 0% smoothly without any flicker or noise and simultaneously synchronize dim with every fixture. Electronic Low Voltage dimming has no minimum run lengths.

Wall wash any applications with a choice of 6°, 10°, 25°, 40°, 10°x40°, 30°x60° or 30°x60°x5° beam patterns for HO or 30°x100° for HO+ Lumen packages. 100-277V, 50/60Hz power input allows these fixtures to be installed anywhere in the world. New patent pending locking bracket rotates 180° for a multitude of light directions. Fast installation is achieved with MODA KWIK CONNECT plugs and install-integral thumb latch connectors. Rugged aluminum design. Protected from corrosion and harsh weather conditions by MODA GUARD—a tough seal which protects the fixture.

Saturated vivid colors change and enhance any environment. Choose from Red, Green, Blue, or Amber. Available in 1ft & 4ft sections. Series is designed for driver or light engine to be factory replaced at its end of life or recycled.

Designed and developed in Las Vegas, USA by MODA.

PAGE

3 FEATURES

4 1 FOOT

5 4 FOOT

6 OPTIC FLEXIBILITY

7 OPTIC FLEXIBILITY CONTINUED

8 ELV WIRING

9 0-10V TO ELV

10 ACCESSORIES: CABLES

11 FIXTURE

12 ACCESSORIES

PHYSICAL

Dimensions	L: 1ft 1 25/32in (349.69mm) W: 2 13/16in(71.81mm) L: 4ft 19/32in (1.23m) H: 2 7/8in(73.42mm)
Applications	Graze, Accent & Indirect General Illumination
Construction	Pure Aluminum Body, Polycarbonate Mounting Bracket and Lens
Ingress Protection	Wet Location IP66
Thermal Management	MODA Aluminum Heat Sink
Beam Angle	6°, 10°, 25°, 40°, 10°x40°, 30°x60°, forward throw asymmetric, or 30°x100° optic options
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0-95% Non Condensing

OUTPUT

CCT & SDCM	N/A
Colors	Red, Green, Blue, and Amber available
Color Bin Tolerance	Single Bin
CRI	N/A
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

COLORS

	HO	HO+
Red	•	•
Green	•	•
Blue	•	•
Amber	•	•

BEAM ANGLES

	HO	HO+
6°	•	
10°	•	
25°	•	
40°	•	
10°x40°	•	
30°x60°	•	
Forward Throw Asymmetric	•	
30°x100°		•

• Available

MODA TECHNOLOGY




moda SOFTWARE [™]	moda ZERO BIN [™]
moda HARDWARE [™]	moda THERMAL MANAGEMENT [™]
moda DYNAMIC WARM [™]	moda AIRFLOW [™]
moda PHOSPHOR [™]	moda COMMUNICATE [™]
moda DRIVER [™]	moda KWIK CONNECT [™]
moda GUARD [™]	moda SEAL [™]



Certification Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, C-Tick, RoHS, & WEEE Compliant.

Class 1

Warranty 3 Year Limited Warranty

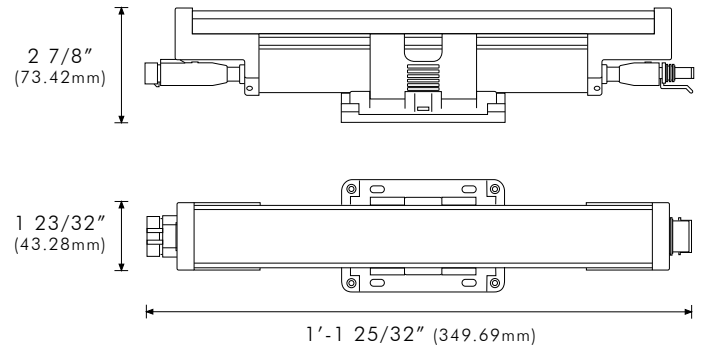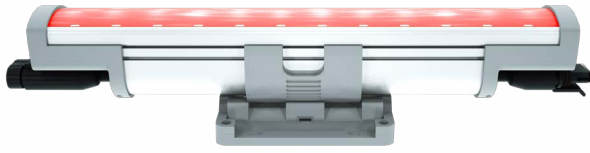


ELV

Output	CCT	6°		10°		25°		40°	
		Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HO	Red	918.00	91.80	906.00	90.60	892.00	89.20	882.00	88.20
	Green	1098.00	109.80	1086.00	108.60	1072.00	107.20	1062.00	106.20
	Blue	642.00	64.20	630.00	63.00	616.00	61.60	606.00	60.60
	Amber	1038.00	103.80	1026.00	102.60	1012.00	101.20	1002.00	100.20

Output	CCT	10°x40°		30°x60°		Forward Throw Asymmetric	
		Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HO	Red	873.00	87.30	870.00	87.00	868.00	86.80
	Green	1053.00	105.30	1050.00	105.00	1048.00	104.80
	Blue	597.00	59.70	594.00	59.40	592.00	59.20
	Amber	993.00	99.30	999.00	99.00	988.00	98.80

Output	CCT	30°x100°		Power				
		Lumens	Efficacy	Consumption	Max Run Length			
HO+	Red	288.00	28.00	100-277V AC	120V AC	277V AC		
	Green	336.00	33.60					
	Blue	240.00	24.00		HO	10W	60 ft	120 ft
	Amber	384.00	38.40		HO+	10W	60 ft	120 ft

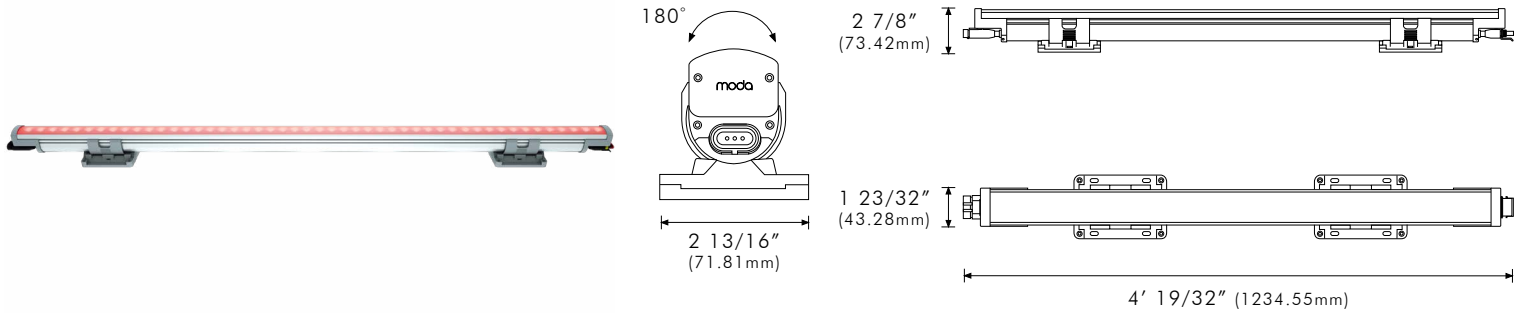


ELV

Output	CCT	6°		10°		25°		40°	
		Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HO	Red	3222.00	80.55	3210.00	80.25	3196.00	79.90	3186.00	79.65
	Green	3942.00	98.55	3950.00	98.75	3930.00	98.25	3906.00	97.65
	Blue	2118.00	52.95	2106.00	52.65	2092.00	52.30	2082.00	52.05
	Amber	3702.00	92.55	3690.00	92.25	3676.00	91.90	3666.00	91.65


Output	CCT	10°x40°		30°x60°		Forward Throw Asymmetric	
		Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HO	Red	3177.00	79.42	3174.00	79.35	3172.00	79.30
	Green	3897.00	97.42	3894.00	97.35	3892.00	97.30
	Blue	2073.00	51.82	2070.00	51.75	2068.00	51.70
	Amber	3657.00	91.42	3654.00	91.35	3652.00	91.30

Output	CCT	30°x100°		Power			
		Lumens	Efficacy	Output	Consumption 100-277V AC	Max Run Length	
HO+	Red	1150.00	28.75			HO	40W
	Green	1339.00	33.47	HO+	40W	60 ft	120 ft
	Blue	958.00	23.95				
	Amber	2880.00	72.00				

6° Beam Angle

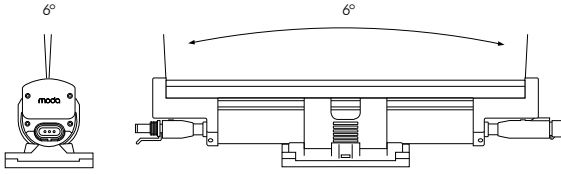

Polar Candela Distribution (HO Green)




Illuminance at a Distance (HO Green)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	50.00 fc	179.50 fc	0.3 ft	0.2 ft
4.0 ft	12.50 fc	44.87 fc	0.7 ft	0.6 ft
6.0 ft	6.25 fc	22.43 fc	1.1 ft	1.0 ft
8.0 ft	3.12 fc	11.21 fc	1.5 ft	1.4 ft
10.0 ft	1.56 fc	5.60 fc	2.0 ft	1.9 ft
12.0 ft	1.25 fc	4.48 fc	2.4 ft	2.3 ft

▲ Vert. Spread: 6° ▲ Horiz. Spread: 6°

10° Beam Angle

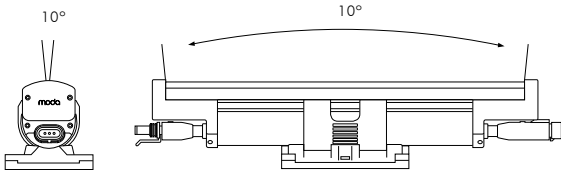

Polar Candela Distribution (HO Green)




Illuminance at a Distance (HO Green)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	47.29 fc	172.03 fc	0.4 ft	0.3 ft
4.0 ft	11.82 fc	43.00 fc	0.8 ft	0.7 ft
6.0 ft	5.91 fc	21.50 fc	1.2 ft	1.1 ft
8.0 ft	2.95 fc	10.75 fc	1.6 ft	1.5 ft
10.0 ft	1.47 fc	5.37 fc	2.1 ft	2.0 ft
12.0 ft	1.18 fc	4.30 fc	2.5 ft	2.4 ft

▲ Vert. Spread: 10° ▲ Horiz. Spread: 10°

25° Beam Angle

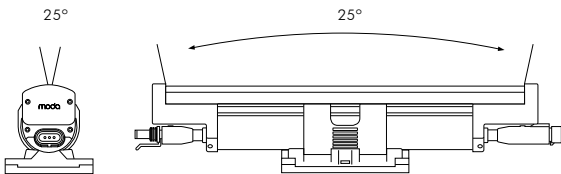

Polar Candela Distribution (HO Green)




Illuminance at a Distance (HO Green)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	28.98 fc	106.27 fc	0.5 ft	0.5 ft
4.0 ft	7.24 fc	26.56 fc	1.0 ft	1.0 ft
6.0 ft	3.62 fc	13.28 fc	1.5 ft	1.6 ft
8.0 ft	1.81 fc	6.64 fc	2.0 ft	2.2 ft
10.0 ft	0.90 fc	3.32 fc	2.5 ft	2.7 ft
12.0 ft	0.72 fc	2.65 fc	3.0 ft	3.2 ft

▲ Vert. Spread: 25° ▲ Horiz. Spread: 25°

40° Beam Angle

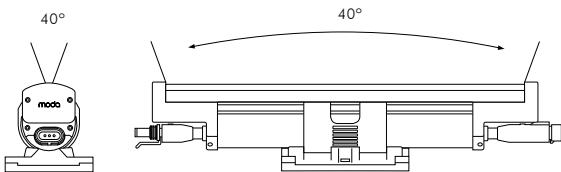

Polar Candela Distribution (HO Green)




Illuminance at a Distance (HO Green)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	13.22 fc	48.64 fc	1.0 ft	0.8 ft
4.0 ft	3.30 fc	12.16 fc	1.9 ft	1.5 ft
6.0 ft	1.65 fc	6.08 fc	2.8 ft	2.4 ft
8.0 ft	0.82 fc	3.04 fc	3.8 ft	3.2 ft
10.0 ft	0.41 fc	1.52 fc	4.8 ft	4.0 ft
12.0 ft	0.33 fc	1.21 fc	5.7 ft	4.7 ft

▲ Vert. Spread: 40° ▲ Horiz. Spread: 40°

10°X40° Beam Angle

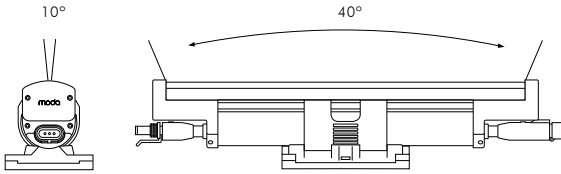

Polar Candela Distribution (HO Green)




Illuminance at a Distance (HO Green)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	33.03 fc	122.23 fc	0.7 ft	0.5 ft
4.0 ft	8.25 fc	30.55 fc	1.5 ft	1.0 ft
6.0 ft	4.12 fc	15.27 fc	2.2 ft	1.4 ft
8.0 ft	2.06 fc	7.63 fc	3.0 ft	1.9 ft
10.0 ft	1.03 fc	3.81 fc	4.6 ft	2.4 ft
12.0 ft	0.82 fc	3.05 fc	4.4 ft	3.0 ft

▲ Vert. Spread: 10° ▲ Horiz. Spread: 40°

30°x60° Beam Angle

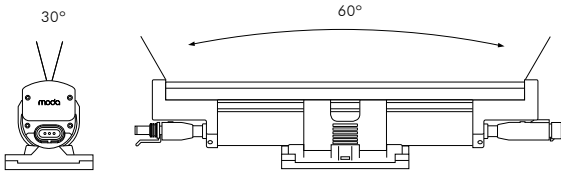

Polar Candela Distribution (HO Green)




Illuminance at a Distance (HO Green)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	84.00 fc	311.52 fc	1.3 ft	2.0 ft
4.0 ft	21.00 fc	77.88 fc	3.1 ft	4.7 ft
6.0 ft	10.50 fc	38.94 fc	4.0 ft	6.6 ft
8.0 ft	5.25 fc	19.47 fc	5.8 ft	9.3 ft
10.0 ft	2.62 fc	9.73 fc	7.0 ft	11.2 ft
12.0 ft	2.10 fc	7.78 fc	9.0 ft	14.0 ft

▲ Vert. Spread: 30° ▲ Horiz. Spread: 60°

30°x60°x5° Beam Angle

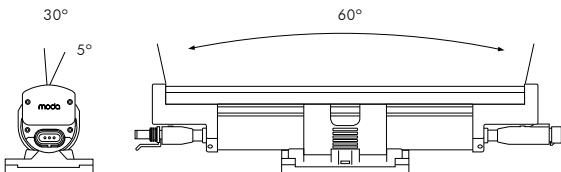

Polar Candela Distribution (HO Green)





Illuminance at a Distance (HO Green)

	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	12.17 fc	45.22 fc	1.3 ft	0.3 ft
4.0 ft	3.04 fc	11.30 fc	2.6 ft	0.9 ft
6.0 ft	1.52 fc	5.65 fc	3.9 ft	1.3 ft
8.0 ft	0.76 fc	2.82 fc	5.2 ft	1.6 ft
10.0 ft	0.38 fc	1.41 fc	6.5 ft	1.9 ft
12.0 ft	0.30 fc	1.13 fc	7.8 ft	2.6 ft


▲ Vert. Spread: 30° ▲ Horiz. Spread: 60°

30°x100° Beam Angle

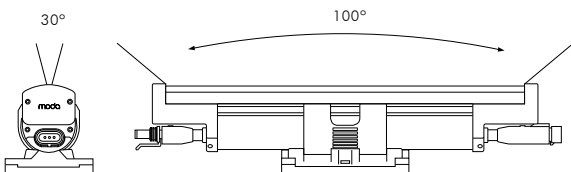


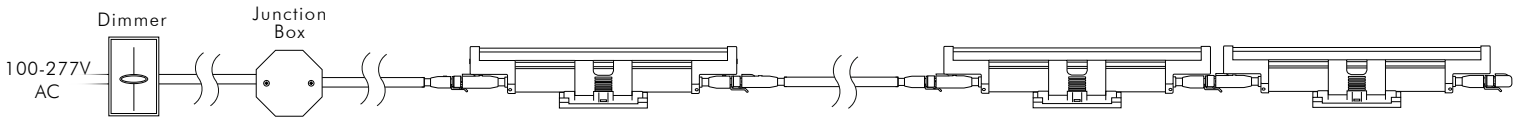

UL / cUL Non-dimming

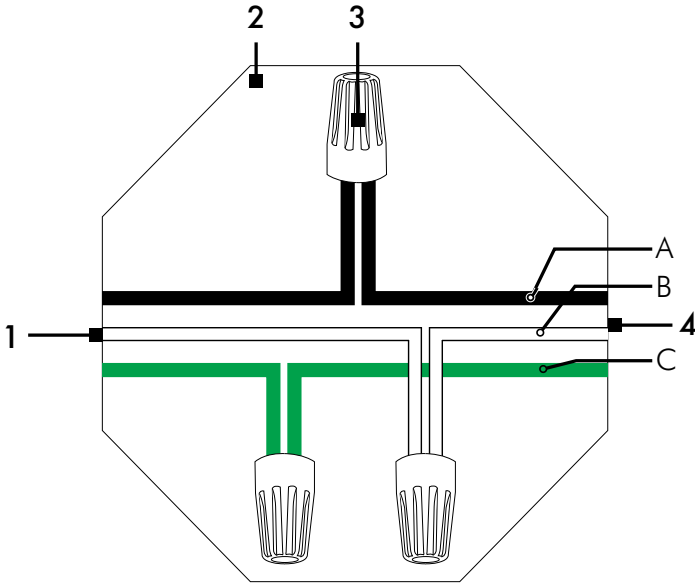

UL / cUL ELV Dimming

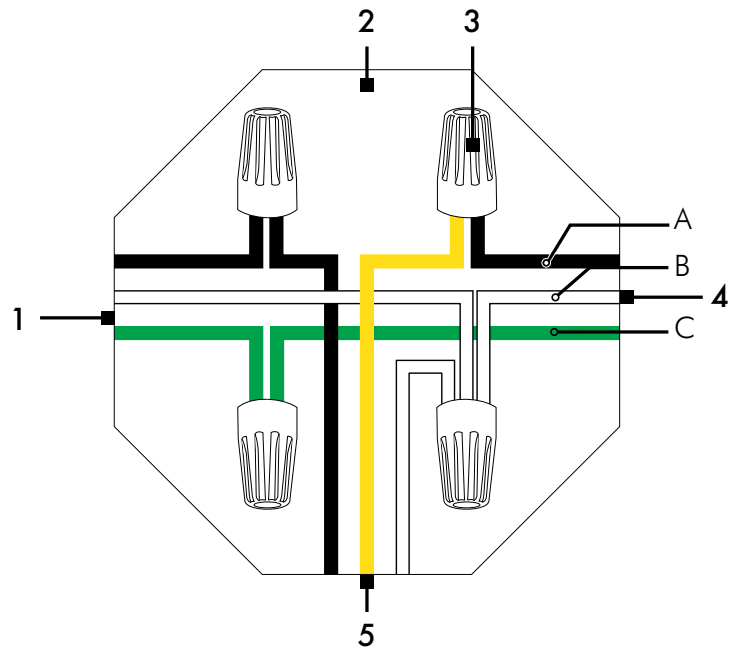

Wiring Legend

1	Power 100-277V AC
2	Junction Box
3	Wiring Nuts
4	3 Pin Leader Cable
5	ELV Dimmer


3 Pin Leader Cable

	UL/cUL	CE/CCC*
A Live 100-277V AC	Black	Brown
B Neutral	White	Blue
C Ground	Green	Green/ Yellow


*Not illustrated

ELV Connectors


Female


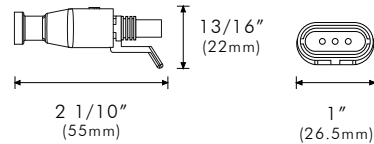


Male

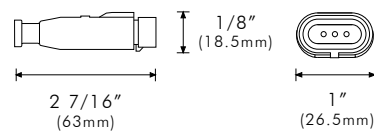

Angle Adjustment




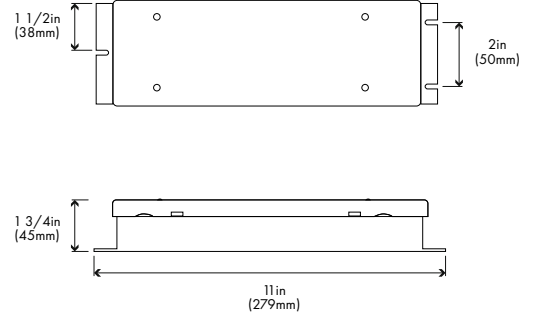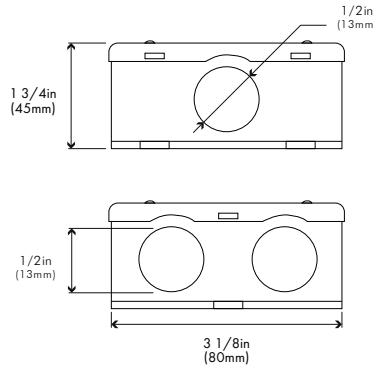

MODA BRIDGE 1

Converting 0-10V to ELV.

MODA BRIDGE 1 solves many installation issues. It accepts a standard 0-10V signal from most dimmers and dimming systems and internally converts this signal into a Electronic Low Voltage (ELV) signal. Thus enabling 0-10V control of an ELV fixture. It is optimized to perform precise smooth flicker free dimming down to 0%. Simple wiring with its integral 1/2" holes which accepts liquid tight or interior conduit connectors. Wire to any 100-277V 50/60 Hz feed. Power up to 840W of fixtures at 120V, 1600W at 230V, and 1900W at 277V. Fully potted enables the installer to mount this product virtually anywhere with its Wet Location IP65 rating. Fully protected from surge, short circuit, open circuit and over temperature. Power Input and data interface protected with High Grade Surge Protection. Designed and developed by MODA LIGHT, Las Vegas USA

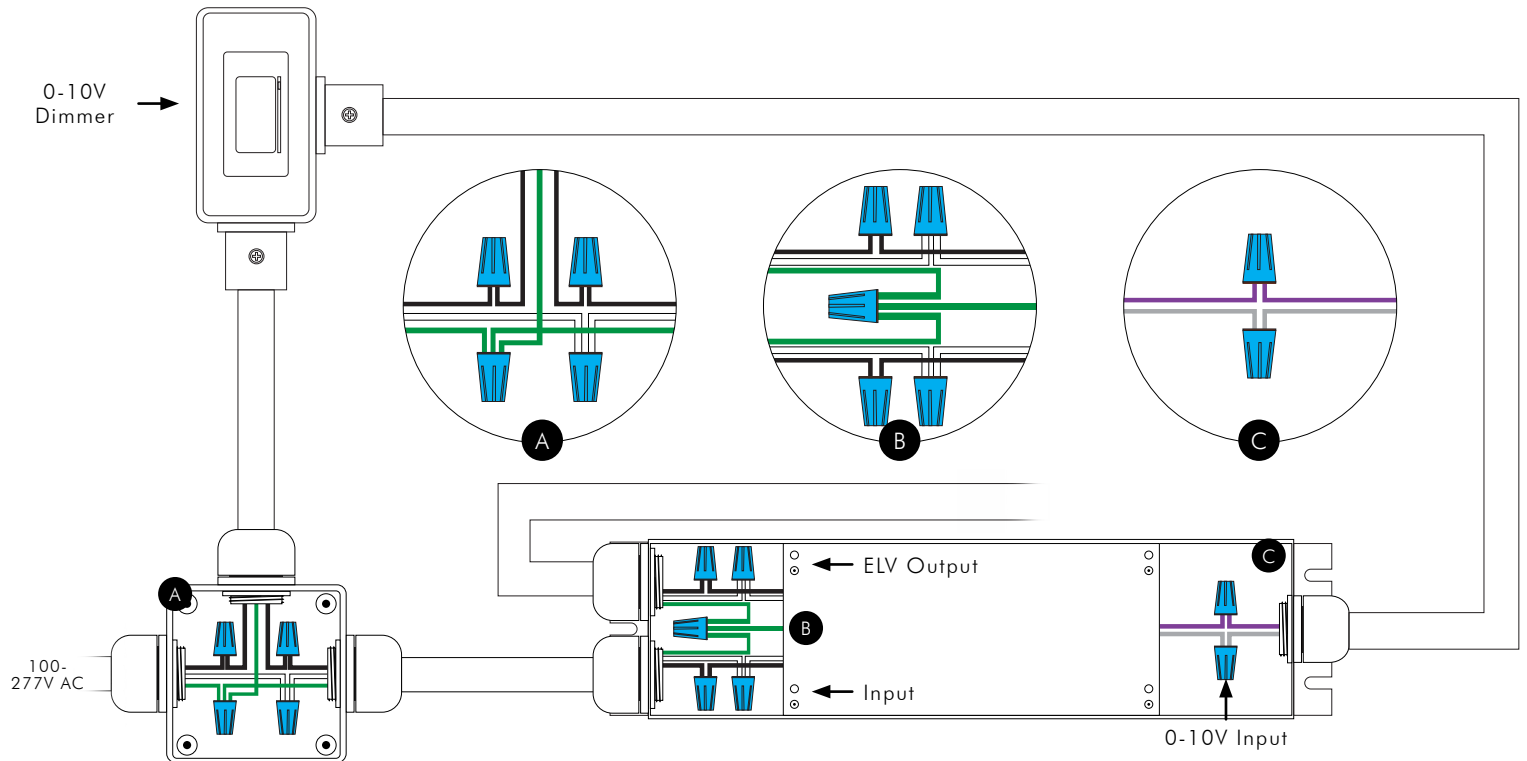

Input	UL/cUL	CE/CCC*
Live 100-277V AC	Black	Brown
Neutral	White	Blue
Ground	Green	Green/Yellow
0-10V / Data +	Purple	Purple
0-10V / Data -	Grey	Grey

*Not illustrated


Output	UL/cUL	CE/CCC*
Live 100-277V AC	Black	Brown
Neutral	White	Blue
Ground	Green	Green/Yellow

*Not illustrated


ELV Leader Cables

Moda Cove Exterior 3 Pin Leader Cables

	UL/cUL
Lengths	25ft and 50ft
Color	Black

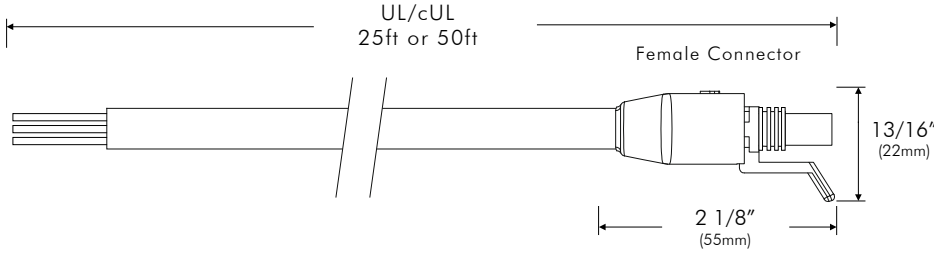


Pin Assignment



Female

	UL/cUL
1 Live 100-277V	Black
2 Ground	Green
3 Neutral	White


Connectors

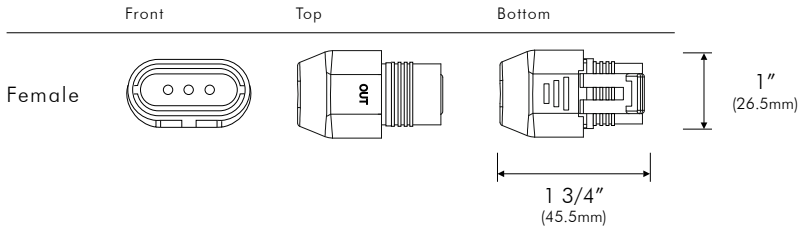


ELV Jumper Cables

Moda Cove Exterior 3 Pin Jumper Cables

	UL/cUL
Lengths	1ft and 4ft
Color	Black

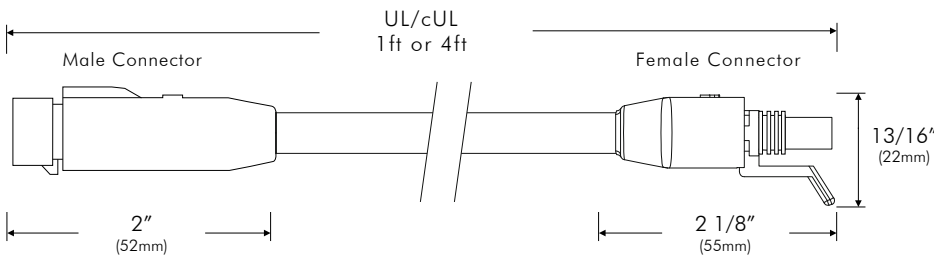


Pin Assignment



Female


	UL/cUL
1 Live 100-277V	Black
2 Ground	Green
3 Neutral	White



Male

	UL/cUL
1 Live 100-277V	Black
2 Ground	Green
3 Neutral	White

Connectors

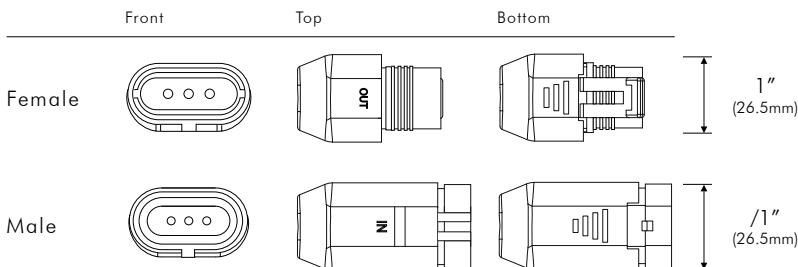



COMPLETE SKU SAMPLE: MGE-HOP-S1-S-IB-1-310

A - FIXTURE & LOCATION

MGE — Moda Graze Exterior

E - LED COLOR

R — Red
A — Amber
G — Green
B — Blue

* Available only in HOP

B - LIGHT OUTPUT

HO — High Output
HOP — High Output Plus

F - LENGTH

1 — 1FT
4 — 4FT

C - SERIES NUMBER

S1 — Series 1

G - OPTIC

6 — 6° x 6°
10 — 10° x 10°
25 — 25° x 25°
40 — 40° x 40°
140 — 10° x 40°
360 — 30° x 60°
365 — Forward Throw Asymmetric
310* — 30° x 100°

* Available only in HOP

D - PRODUCT FINISH

S — Silver

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 3 Pin 25ft	Power to first fixture of run	MLCE-US-3PIN-B-25FT
Leader Cable US 3 Pin 50ft	Power to first fixture of run	MLCE-US-3PIN-B-50FT
Jumper Cable US 3 Pin 1ft	Connection between fixtures	MJCE-US-3PIN-B-1FT
Jumper Cable US 3 Pin 4ft	Connection between fixtures	MJCE-US-3PIN-B-4FT
Terminator 3 Pin	Must be fixed to last fixture for safety	MTE-3PIN-B
Exterior Bracket Lock	Holds fixture in place for vertical installations	MCGE-BL-G

CONTROLS	DESCRIPTION	SKU
Bridge 1 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	250-0000