
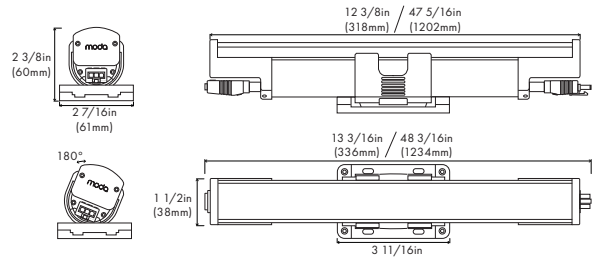


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____

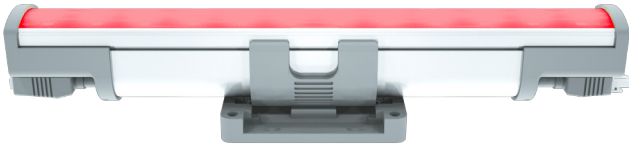

PHYSICAL

Dimensions	L: 12 3/8in (316mm)	W: 2 3/8in (60mm)
	L: 47 5/16in (1202mm)	H: 2 7/16in (61mm)
Weight	12in: 1.0lbs (0.45kg)	
	48in: 3.1lbs (1.4kg)	
Applications	Cove, Accent, & Indirect General Illumination	
Construction	Pure Aluminum Body, Polycarbonate Mounting Bracket and Polycarbonate Optical Lens	
Ingress Protection	Dry/Damp Location IP44	
Thermal Management	Moda Aluminum Heat Sink	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)	
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)	
Humidity	0-95% Non Condensing	

OUTPUT

Colors	Red, Green, Blue, and Amber available
Beam Angle	120°
CRI	94-98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08
Dimming Range	100%-0% flicker-free

POWER CONSUMPTION

	120V - 277V AC	
	1FT	4FT
HO	10W	40W

SPECIFICATIONS

	Lumens		Efficacy	
	1FT	4FT	1FT	4FT
HO	492 - 948	1968 - 3792	49 - 94	49 - 94

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
HO	60ft	60ft	120ft

	FIXTURE	ORDERING SKU
ELV HO 1FT	Moda Cove Interior High Output Silver ELV Dimming Amber 1FT	MCI-HO-S1-S-A-1
	Moda Cove Interior High Output Silver ELV Dimming Blue 1FT	MCI-HO-S1-S-B-1
	Moda Cove Interior High Output Silver ELV Dimming Green 1FT	MCI-HO-S1-S-G-1
	Moda Cove Interior High Output Silver ELV Dimming Red 1FT	MCI-HO-S1-S-R-1
ELV HO 4FT	Moda Cove Interior High Output Silver ELV Dimming Amber 4FT	MCI-HO-S1-S-A-4
	Moda Cove Interior High Output Silver ELV Dimming Blue 4FT	MCI-HO-S1-S-B-4
	Moda Cove Interior High Output Silver ELV Dimming Green 4FT	MCI-HO-S1-S-G-4
	Moda Cove Interior High Output Silver ELV Dimming Red 4FT	MCI-HO-S1-S-R-4

ACCESSORIES	DESCRIPTION	ORDERING SKU
Leader Cable US 3 Pin 10FT	Power to first fixture of run	MLCI-US-3PIN-G-10FT
Leader Cable US 3 Pin 25FT	Power to first fixture of run	MLCI-US-3PIN-G-25FT
Jumper Cable US 3 Pin 1FT	Connection between fixtures	MJCI-US-3PIN-G-1FT
Jumper Cable US 3 Pin 4FT	Connection between fixtures	MJCI-US-3PIN-G-4FT
Terminator 3 Pin	Must be fixed to last fixture for safety	MTI-3PIN-G
Interior Bracket Lock	Holds fixture in place for vertical installation	MCGI-BL-G

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
MODA Bridge 1 2.0 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	MODA-BRIDGE-1-S2-S	250-0000