
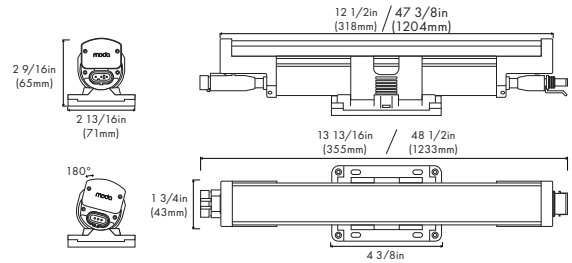


Project Name: \_\_\_\_\_ SKU: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

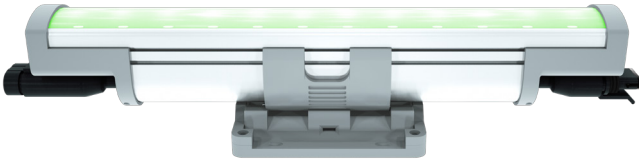

## PHYSICAL

<b>Dimensions</b>	L: 12 1/2in (318mm) L: 47 3/8in (1204mm)	W: 2 13/16in (71mm) H: 2 9/16in (65mm)
<b>Weight</b>	12in: 1.3lbs (0.6kg) 48in: 4.6lbs (2.1kg)	
<b>Applications</b>	Cove, Accent, & Indirect General Illumination	
<b>Construction</b>	Pure Aluminum Body, Polycarbonate Mounting Bracket and Polycarbonate Optical Lens	
<b>Ingress Protection</b>	Wet Location IP66	
<b>Thermal Management</b>	Moda Aluminum Heat Sink	
<b>Fixture Connections</b>	Integral Male & Female Connectors	
<b>Operating Temperature</b>	-40°F ~ 122°F (-40°C ~ 50°C)	
<b>Storage Temperature</b>	-40°F ~ 176°F (-40°C ~ 80°C)	
<b>Humidity</b>	0-95% Non Condensing	

## SPECIFICATIONS

	Lumens		Efficacy	
	1FT	4FT	1FT	4FT
HO	492 - 948	1968 - 3792	49 - 94	49 - 94
HO+	240 - 1104	958 - 4420	24 - 110	24 - 110

## POWER CONSUMPTION

120V - 277V AC

	1FT	4FT
HO	10W	40W
HO+	10W	40W

## ELECTRICAL

<b>Input Voltage</b>	100-277V AC 50Hz/60Hz
<b>Control</b>	Electronic Low Voltage Reverse Phase Trailing Edge
<b>Power Factor</b>	≥ 0.98

## MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
HO	60ft	60ft	120ft
HO+	60ft	60ft	120ft

## OUTPUT

<b>Colors</b>	Yellow, Pink, Cyan, Violet, Turquoise, Ice Blue, Light Green, Golden Yellow, Dark Blue, and Dark Orange available
<b>Beam Angle</b>	120°
<b>CRI</b>	94-98
<b>SDCM</b>	2-Step MacAdam Ellipse
<b>Color Bin Tolerance</b>	Single Bin
<b>Lumen Maintenance</b>	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
<b>Testing Data</b>	Light Data LM-79-08 & LM-80-08
<b>Dimming Range</b>	100%-0% flicker-free

## COLOR AVAILABILITY

COLOR	HO	HO+	COLOR	HO	HO+
Cyan		•	Golden Yellow		•
Ice Blue		•	Turquoise		•
Light Green		•	Pink		•
Yellow		•	Violet		•

• Available

## STANDARDS & CERTIFICATIONS



<b>Certification</b>	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
<b>Class</b>	1
<b>Warranty</b>	3 Year Limited Warranty

	FIXTURE	ORDERING SKU
ELV HOP 1FT	Moda Cove Exterior High Output Plus Silver ELV Dimming Cyan 1FT	MCE-HOP-S1-S-C-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Golden Yellow 1FT	MCE-HOP-S1-S-GY-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Ice Blue 1FT	MCE-HOP-S1-S-IB-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Light Green 1FT	MCE-HOP-S1-S-LG-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Pink 1FT	MCE-HOP-S1-S-P-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Turquoise 1FT	MCE-HOP-S1-S-TQ-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Violet 1FT	MCE-HOP-S1-S-V-1
	Moda Cove Exterior High Output Plus Silver ELV Dimming Yellow 1FT	MCE-HOP-S1-S-Y-1
ELV HOP 4FT	Moda Cove Exterior High Output Plus Silver ELV Dimming Cyan 4FT	MCE-HOP-S1-S-C-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Golden Yellow 4FT	MCE-HOP-S1-S-GY-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Ice Blue 4FT	MCE-HOP-S1-S-IB-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Light Green 4FT	MCE-HOP-S1-S-LG-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Pink 4FT	MCE-HOP-S1-S-P-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Turquoise 4FT	MCE-HOP-S1-S-TQ-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Violet 4FT	MCE-HOP-S1-S-V-4
	Moda Cove Exterior High Output Plus Silver ELV Dimming Yellow 4FT	MCE-HOP-S1-S-Y-4

ACCESSORIES	DESCRIPTION	ORDERING SKU
Leader Cable US 3 Pin 25FT	Power to first fixture of run	MLCE-US-3PIN-B-25FT
Leader Cable US 3 Pin 50FT	Power to first fixture of run	MLCE-US-3PIN-B-50FT
Jumper Cable US 3 Pin 1FT	Connection between fixtures	MJCE-US-3PIN-B-1FT
Jumper Cable US 3 Pin 4FT	Connection between fixtures	MJCE-US-3PIN-B-4FT
Terminator 3 Pin	Must be fixed to last fixture for safety	MTE-3PIN-B
Exterior Bracket Lock	Holds fixture in place for vertical installation	MCGE-BL-G

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
MODA Bridge 1 2.0 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	MODA-BRIDGE-1-S2-S	250-0000