


Client: _____ Project Name: _____

MODA Contact: _____ E-Mail: _____

SKU: _____ Type: _____ PO#: _____ Quantity: _____

Notes: _____

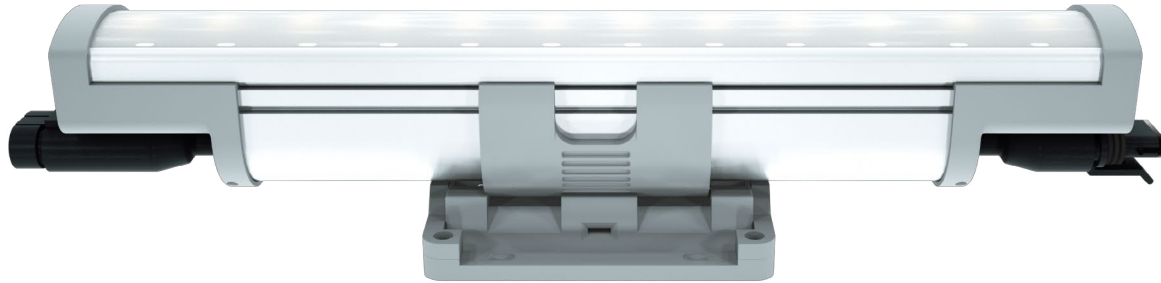

Specification Grade Premium Exterior Graze Fixture.

MODA GRAZE Exterior is a patent pending cove lighting system designed for exterior applications. Utilizing MODA's latest software and dimming technology with its onboard dimming chipset and MODA firmware, this series can dim to 0% smoothly without any flicker or noise and simultaneously synchronize dim with every fixture. Electronic Low Voltage dimming has no minimum run lengths. With MODA's methods of precision and high standards of work, MODA achieves perfect illumination. Color Rendering Index is at a MODA standard of 94-98. R1 - R15 values are in excess of 90. No striations, no color over angle, and no dark spots.

Small in physical size, yet powerful with up to 1200 lm/ft. Wall wash any applications with a choice of 6°, 10°, 25°, 40°, 10°x40°, 30°x60° or forward throw asymmetric beam patterns for SO+ and HO or 30°x100° for LO, SO or HO+ Lumen packages. Standard color temperatures available are 2200K, 2700K, 3000K, 3500K, and 4000K. Other CCT are available by request. 100-277V AC, 50/60Hz power input allows these fixtures to be installed anywhere in the world. New patent pending locking bracket rotates 180° for a multitude of light directions. Rugged aluminum design. Protected from corrosion and harsh weather conditions by MODA GUARD—a tough seal which protects the fixture. Fast installation is achieved with MODA KWIK CONNECT plugs and install-integral thumb latch connectors. Choice of five lumen packages ranging from 200 lm/ft to 1200 lm/ft. Available in 1ft & 4ft sections. Series is designed for driver or light engine to be factory replaced at its end of life or recycled.

Designed and developed in Las Vegas, USA by MODA.

PAGE

3 FEATURES

4 1 FOOT

5 4 FOOT

6 OPTIC FLEXIBILITY

7 OPTIC FLEXIBILITY

8 TM30

9 TM30

10 ELV WIRING

11 0-10V TO ELV

12 ACCESSORIES: CABLES

13 FIXTURES AND ACCESSORIES

PHYSICAL

Dimensions	L: 12 1/2in (318mm)	W: 2 13/16in (71mm)
	L: 47 3/8in (1204mm)	H: 2 9/16in (65mm)
Weight	12in: 1.3lbs (0.6kg)	
	48in: 4.9lbs (2.22kg)	
Applications	Graze, Accent, & Indirect General Illumination	
Construction	Pure Aluminum Body, Polycarbonate Mounting Bracket and Polycarbonate Optical Lens	
Ingress Protection	Wet Location IP66	
Thermal Management	Moda Aluminum Heat Sink	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)	
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)	
Humidity	0-95% Non Condensing	

SPECIFICATIONS

	Lumens		Efficacy	
	1FT	4FT	1FT	4FT
LO	250 - 352	1002 - 1406	62 - 88	62 - 87
SO	339 - 494	1368 - 1975	68 - 99	72 - 104
SO+	890 - 951	3261 - 3358	89 - 94	81 - 84
HO	1140 - 1407	4264 - 5163	114 - 141	106 - 129
HO+	1085 - 1240	4300 - 4960	108 - 124	108 - 124

POWER CONSUMPTION

	120V - 277V AC	
	1FT	4FT
LO	4W	16W
SO	5W	19W
SO+	10W	40W
HO	10W	40W
HO+	10W	40W

OUTPUT

Colors	2200K*, 2700K, 3000K, 3500K, 4000K
Beam Angle	6°, 10°, 25°, 40°, 10°x40°, 30°x60°, Forward Throw Asymmetric, or 30°x100° optic options
CRI	94-98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

*2200K not available for SO+ or HO.

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

MAX CONTINUOUS RUN

	120V AC	277V AC
LO	180ft	360ft
SO	120ft	240ft
SO+	60ft	120ft
HO	60ft	120ft
HO+	60ft	120ft


MODA TECHNOLOGY

moda SOFTWARE [™]	moda ZERO BIN [™]
moda HARDWARE [™]	moda THERMAL MANAGEMENT [™]
moda PHOSPHOR [™]	moda AIRFLOW [™]
moda HIGH CRI [™]	moda COMMUNICATE [™]
moda DRIVER [™]	moda KWIK CONNECT [™]
moda GUARD [™]	moda SEAL [™]

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	3 Year Limited Warranty

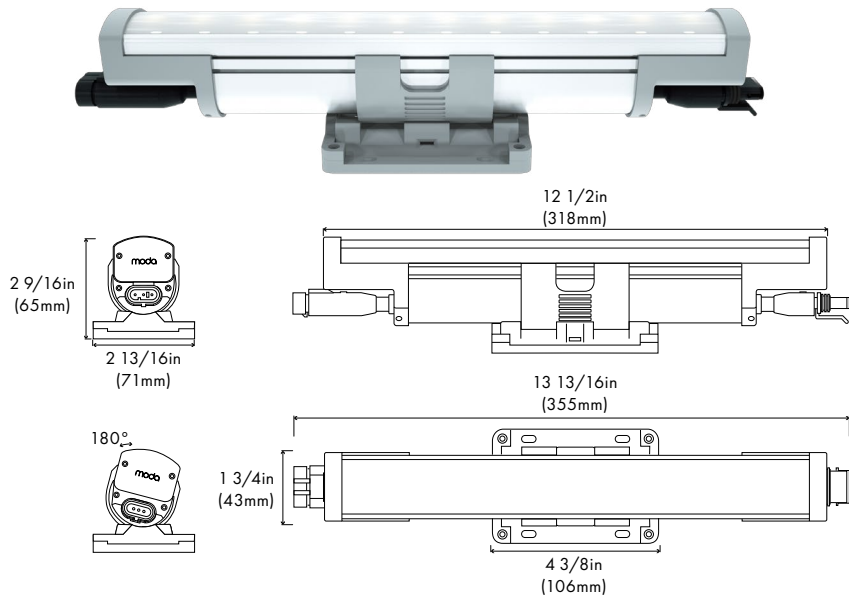

ELV

1FT	6°		10°		25°		40°		10°x40°		30°x60°		Forward Throw Asymmetric		
Output	CCT	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
SO+	2700K	940.08	94.00	928.08	92.80	914.08	91.40	904.08	90.40	1012.70	101.27	892.08	89.08	890.08	89.00
	3000K	942.05	94.20	930.05	93.00	916.05	91.60	906.05	90.60	1014.30	101.43	894.50	89.40	892.05	89.20
	3500K	945.05	94.50	933.05	93.30	919.05	91.90	909.05	90.90	1017.60	101.76	897.05	89.70	895.05	89.50
	4000K	951.05	95.10	939.05	93.90	925.05	92.50	915.05	91.50	1026.30	102.63	903.05	90.30	901.05	90.10
HO	2700K	1190.26	119.02	1178.26	117.82	1164.26	116.42	1154.26	115.42	1145.26	114.52	1142.26	114.22	1140.26	114.02
	3000K	1320.36	132.03	1298.36	129.83	1284.36	128.43	1197.05	119.71	1265.36	126.53	1262.36	126.23	1260.36	126.03
	3500K	1358.10	135.81	1346.10	134.61	1322.10	133.21	1322.10	132.21	1313.10	131.31	1310.10	132.01	1308.10	130.81
	4000K	1407.15	140.71	1395.15	139.51	1381.15	138.11	1371.15	137.11	1362.15	136.21	1359.15	135.91	1359.15	135.91


1FT	30°x100°			30°x100°			30°x100°				
Output	CCT	Lumens	Efficacy	Output	CCT	Lumens	Efficacy	Output	CCT	Lumens	Efficacy
LO	2200K	250.50	62.00	SO	2200K	339.80	67.96	HO+	2200K	1085.20	108.52
	2700K	310.00	77.00		2700K	450.67	90.13		2700K	1219.74	121.97
	3000K	322.00	83.00		3000K	490.25	98.05		3000K	1223.56	122.35
	3500K	344.00	86.00		3500K	491.33	98.26		3500K	1236.09	123.60
4000K	352.00	88.00	4000K	493.84	98.76	4000K	1240.01	124.00			

BEAM ANGLE

	LO	SO	SO+	HO	HO+
6° / 10° / 25° / 40° / 10°x40° / 30°x60° Forward Throw Asymmetric			•	•	
30°x100°	•	•			•

• Available

Output	Power Consumption		Max Run Length	
	100-277V AC		120V AC	277V AC
LO	4W		180 ft	360 ft
SO	5W		120 ft	240 ft
SO+	10W		60 ft	120 ft
HO	10W		60 ft	120 ft
HO+	10W		60 ft	120 ft

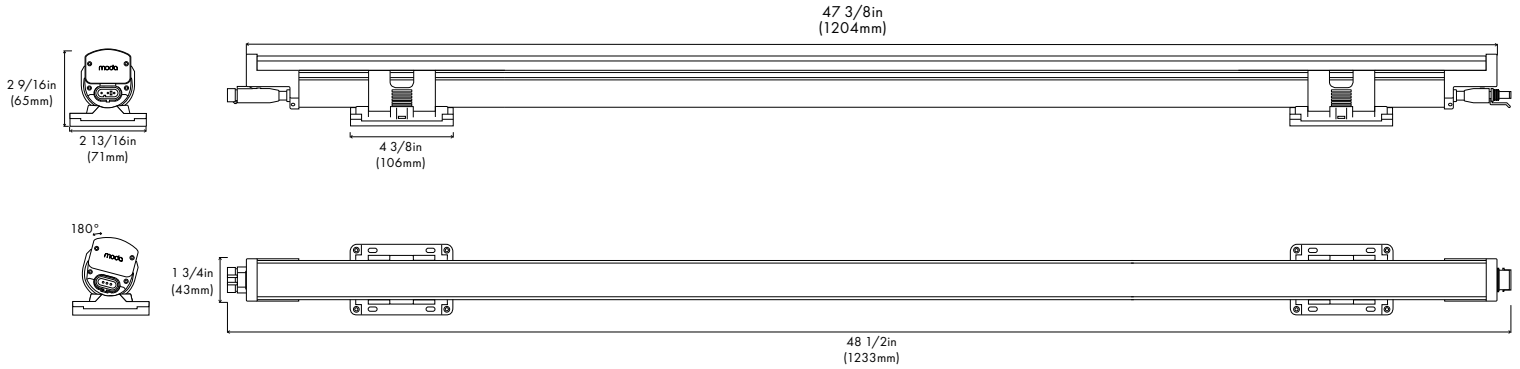

ELV

4FT	6°		10°		25°		40°		10°x40°		30°x60°		Forward Throw Asymmetric		
Output	CCT	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
SO+	2700K	3310.67	82.76	3298.67	82.46	3284.68	82.11	3274.68	81.86	3765.68	81.64	3262.68	81.56	3260.68	81.51
	3000K	3318.23	82.95	3306.23	82.65	3292.23	82.30	3282.23	82.05	3273.23	81.83	3270.23	81.75	3292.23	82.30
	3500K	3335.20	83.38	3323.20	83.08	3309.20	82.73	3299.10	82.48	3290.20	82.25	3287.20	82.18	3285.20	82.13
	4000K	3358.40	83.96	3346.40	83.66	3332.40	83.31	3322.40	83.06	3313.40	82.83	3310.40	82.76	3308.40	82.71
HO	2700K	4314.02	107.85	4302.02	107.55	4288.02	107.20	4278.02	106.95	4269.02	106.72	4266.02	106.65	4264.02	106.60
	3000K	4785.40	119.63	4773.40	119.34	4759.40	118.98	4749.40	118.73	4740.40	118.51	4737.40	118.43	4735.40	118.38
	3500K	4982.40	124.56	4956.40	123.91	4956.40	123.91	4946.40	123.66	4937.40	123.43	4934.40	123.36	4932.40	123.31
	4000K	5162.60	129.06	5150.60	128.77	6136.60	128.41	5126.60	128.16	5117.60	127.94	5114.60	127.86	5112.60	127.81


4FT	30°x100°			30°x100°			30°x100°				
Output	CCT	Lumens	Efficacy	Output	CCT	Lumens	Efficacy	Output	CCT	Lumens	Efficacy
LO	2200K	1002.00	62.62	SO	2200K	1368.11	72.00	HO+	2200K	4300.80	107.52
	2700K	1234.00	77.00		2700K	1783.10	93.84		2700K	4587.96	114.69
	3000K	1316.00	82.00		3000K	1820.18	95.79		3000K	4794.28	119.85
	3500K	1366.00	85.00		3500K	1900.45	100.02		3500K	4844.63	121.11
4000K	1406.00	87.00	4000K	1975.36	103.96	4000K	4960.04	124.00			

BEAM ANGLE


	LO	SO	SO+	HO	HO+
6° / 10° / 25° / 40° / 10°x40° / 30°x60° Forward Throw Asymmetric			•	•	
30°x100°	•	•			•
					• Available

Output	Power Consumption		Max Run Length	
	100-277V AC		120V AC	277V AC
LO	16W		180 ft	360 ft
SO	19W		120 ft	240 ft
SO+	40W		60 ft	120 ft
HO	40W		60 ft	120 ft
HO+	40W		60 ft	120 ft

6° Beam Angle

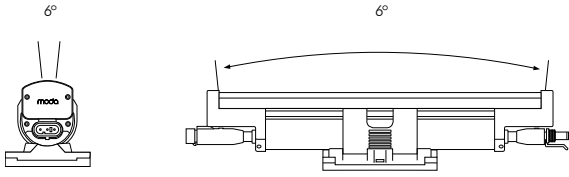

Polar Candela Distribution




Illuminance at a Distance (HO 4000K)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	41.43 fc	152.02 fc	0.4 ft	0.3 ft
4.0 ft	10.35 fc	38.00 fc	0.8 ft	0.7 ft
6.0 ft	5.17 fc	19.00 fc	1.2 ft	1.1 ft
8.0 ft	2.58 fc	9.50 fc	1.6 ft	1.5 ft
10.0 ft	1.29 fc	4.75 fc	2.1 ft	2.0 ft
12.0 ft	1.03 fc	3.80 fc	2.5 ft	2.4 ft

▲ Vert. Spread: 6° ▲ Horiz. Spread: 6°

10° Beam Angle

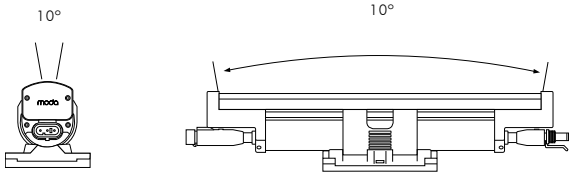

Polar Candela Distribution




Illuminance at a Distance (HO 4000K)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	60.76 fc	224.32 fc	0.4 ft	0.3 ft
4.0 ft	15.19 fc	56.08 fc	0.8 ft	0.7 ft
6.0 ft	7.59 fc	28.04 fc	1.2 ft	1.1 ft
8.0 ft	3.79 fc	14.02 fc	1.6 ft	1.5 ft
10.0 ft	1.89 fc	7.01 fc	2.1 ft	2.0 ft
12.0 ft	1.51 fc	5.60 fc	2.5 ft	2.4 ft

▲ Vert. Spread: 10° ▲ Horiz. Spread: 10°

25° Beam Angle

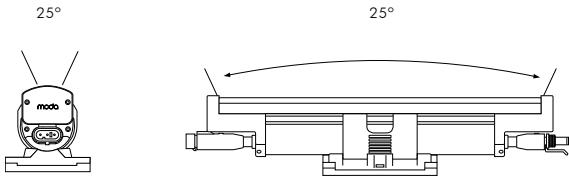

Polar Candela Distribution




Illuminance at a Distance (HO 4000K)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	37.34 fc	224.32 fc	0.5 ft	0.5 ft
4.0 ft	9.33 fc	56.08 fc	1.0 ft	1.0 ft
6.0 ft	4.66 fc	28.04 fc	1.5 ft	1.6 ft
8.0 ft	2.33 fc	14.02 fc	2.0 ft	2.2 ft
10.0 ft	1.16 fc	7.01 fc	2.5 ft	2.7 ft
12.0 ft	0.93 fc	5.60 fc	3.0 ft	3.2 ft

▲ Vert. Spread: 25° ▲ Horiz. Spread: 25°

40° Beam Angle

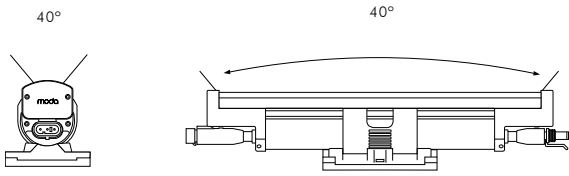

Polar Candela Distribution




Illuminance at a Distance (HO 4000K)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	17.07 fc	63.84 fc	1.0 ft	0.8 ft
4.0 ft	4.26 fc	15.96 fc	1.9 ft	1.5 ft
6.0 ft	2.13 fc	7.98 fc	2.8 ft	2.4 ft
8.0 ft	1.06 fc	3.99 fc	3.8 ft	3.2 ft
10.0 ft	0.53 fc	2.00 fc	4.8 ft	4.0 ft
12.0 ft	0.42 fc	1.60 fc	5.7 ft	4.7 ft

▲ Vert. Spread: 40° ▲ Horiz. Spread: 40°

10°X40° Beam Angle

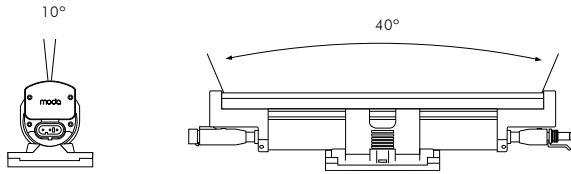

Polar Candela Distribution (HO 4000K)




Illuminance at a Distance (HO 4000K)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	42.72 fc	160.52 fc	0.7 ft	0.5 ft
4.0 ft	10.68 fc	40.13 fc	1.5 ft	1.0 ft
6.0 ft	5.34 fc	20.06 fc	2.2 ft	1.4 ft
8.0 ft	2.67 fc	10.03 fc	3.0 ft	1.9 ft
10.0 ft	1.33 fc	5.01 fc	4.6 ft	2.4 ft
12.0 ft	1.06 fc	4.01 fc	4.4 ft	3.0 ft

▲ Vert. Spread: 10° ▲ Horiz. Spread: 40°

30°x60° Beam Angle

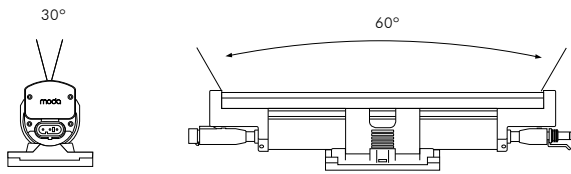

Polar Candela Distribution (HO 4000K)




Illuminance at a Distance (HO 4000K)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	108.73 fc	409.17 fc	1.3 ft	2.0 ft
4.0 ft	27.18 fc	102.29 fc	3.1 ft	4.7 ft
6.0 ft	13.59 fc	51.15 fc	4.0 ft	6.6 ft
8.0 ft	6.79 fc	25.15 fc	5.8 ft	9.3 ft
10.0 ft	3.39 fc	12.79 fc	7.0 ft	11.2 ft
12.0 ft	2.71 fc	10.23 fc	9.0 ft	14.0 ft

▲ Vert. Spread: 30° ▲ Horiz. Spread: 60°

30°x60°x5° Beam Angle

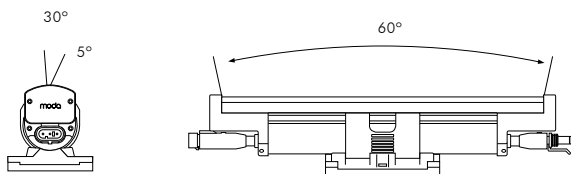

Polar Candela Distribution (HO 4000K)




Illuminance at a Distance (HO 4000K)


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	37.34 fc	59.40 fc	0.5 ft	0.5 ft
4.0 ft	9.33 fc	14.85 fc	1.0 ft	1.0 ft
6.0 ft	4.66 fc	7.42 fc	1.5 ft	1.6 ft
8.0 ft	2.33 fc	3.71 fc	2.0 ft	2.2 ft
10.0 ft	1.16 fc	1.85 fc	2.5 ft	2.7 ft
12.0 ft	0.93 fc	1.48 fc	3.0 ft	3.2 ft

▲ Vert. Spread: 30° ▲ Horiz. Spread: 60°

30°x100° Beam Angle

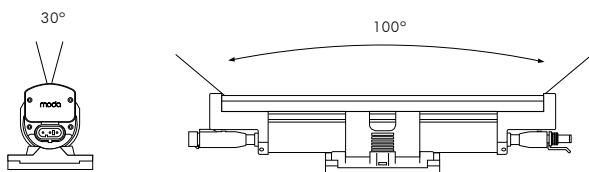

Polar Candela Distribution (HO+ 4000K)




Illuminance at a Distance (HO+ 4000K)



	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	114.8 fc	459.20 fc	1.3 ft	2.0 ft
4.0 ft	28.7 fc	114.80 fc	3.1 ft	4.2 ft
6.0 ft	14.3 fc	57.40 fc	4.0 ft	6.6 ft
8.0 ft	7.1 fc	28.7 fc	5.8 ft	9.3 ft
10.0 ft	3.5 fc	14.30 fc	7.0 ft	11.2 ft
12.0 ft	2.8 fc	11.40 fc	9.0 ft	14.0 ft

▲ Vert. Spread: 30° ▲ Horiz. Spread: 100°


2200K TM30

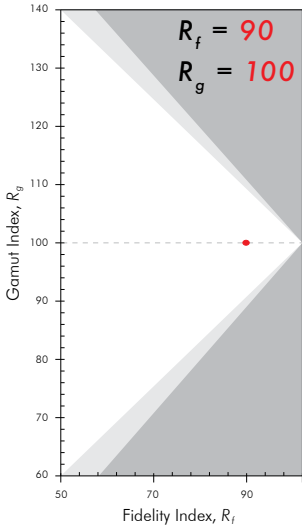



Color Evaluation Sample

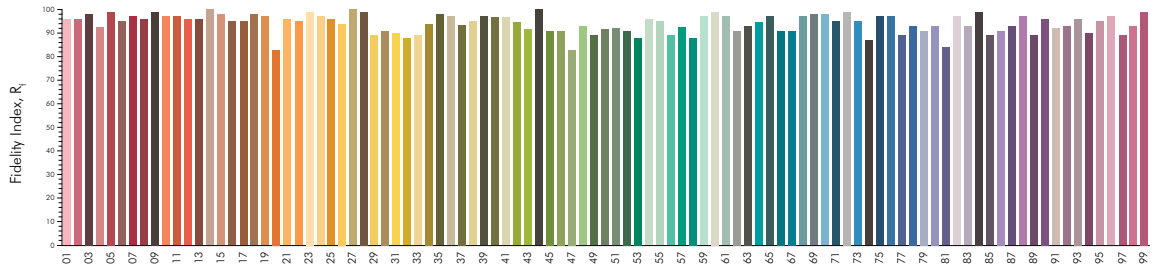


2700K TM30

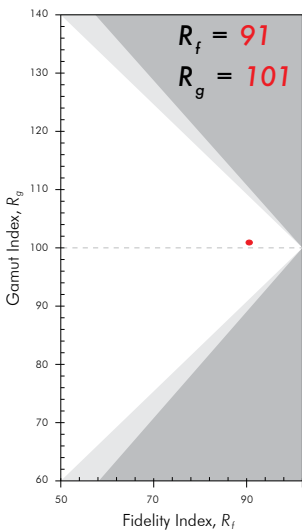



Color Evaluation Sample

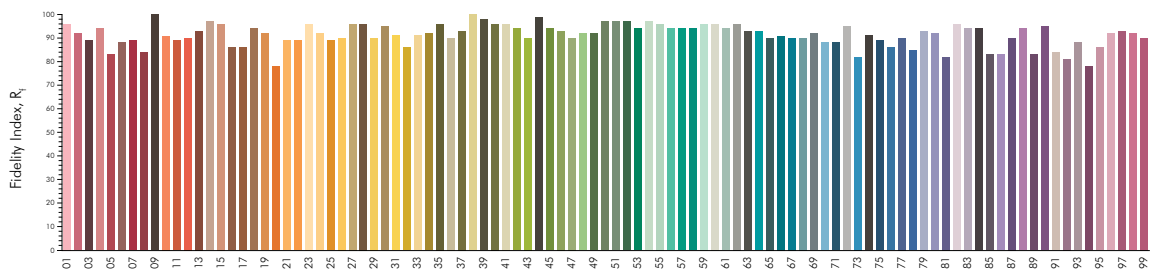


3000K TM30

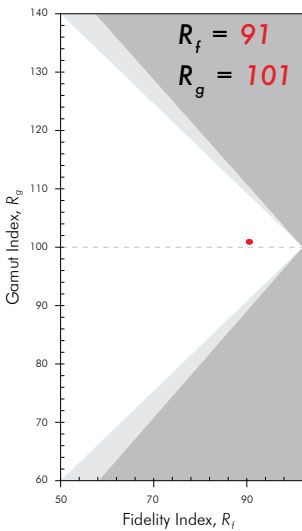



Color Evaluation Sample

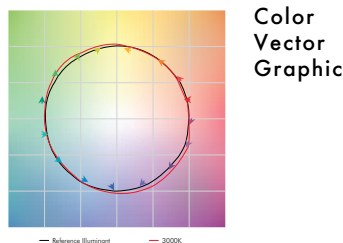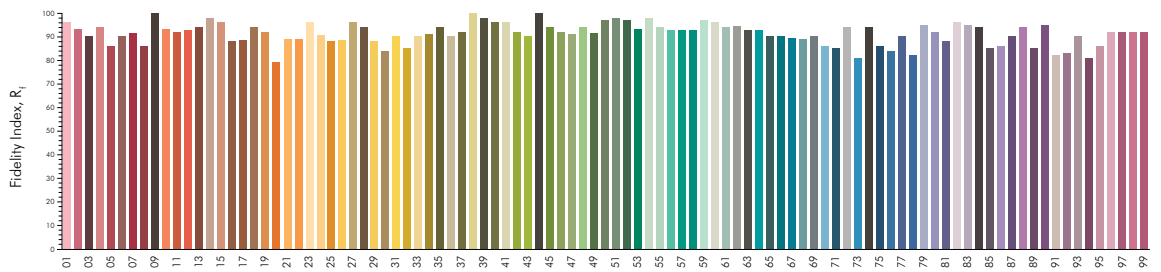

3500K TM30

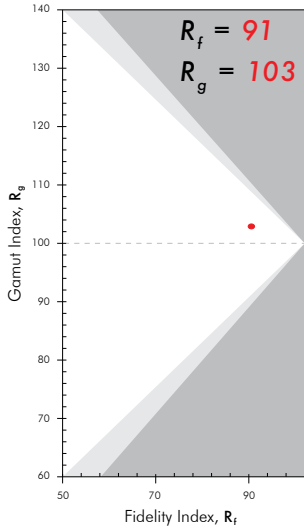

Color Evaluation Sample

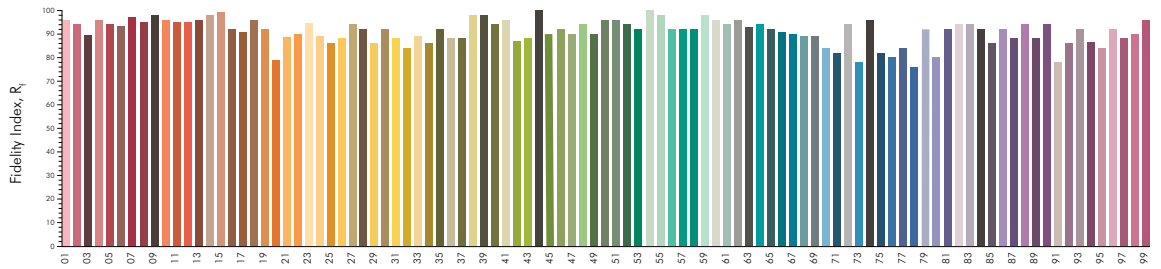


Color Vector Graphic





Color Distortion Graphic

4000K TM30

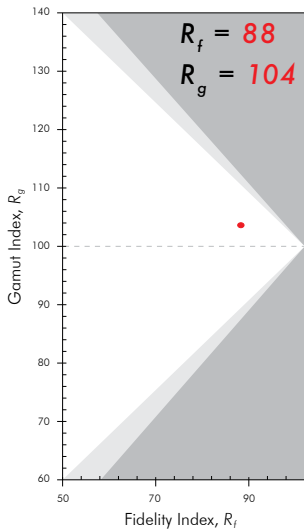


Color Evaluation Sample

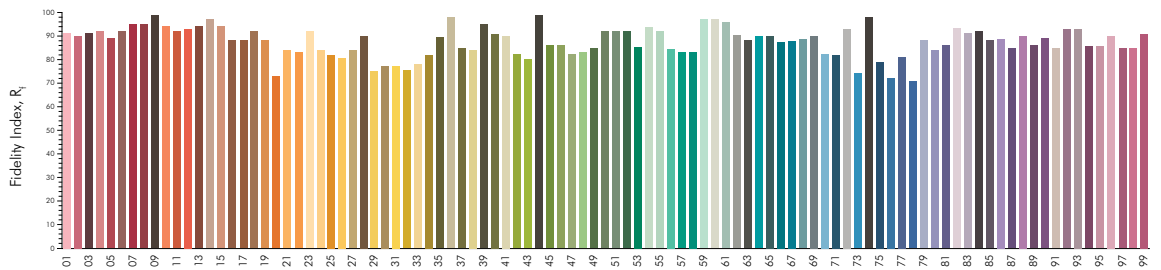


Color Vector Graphic




Color Distortion Graphic



UL / cUL Non-dimming

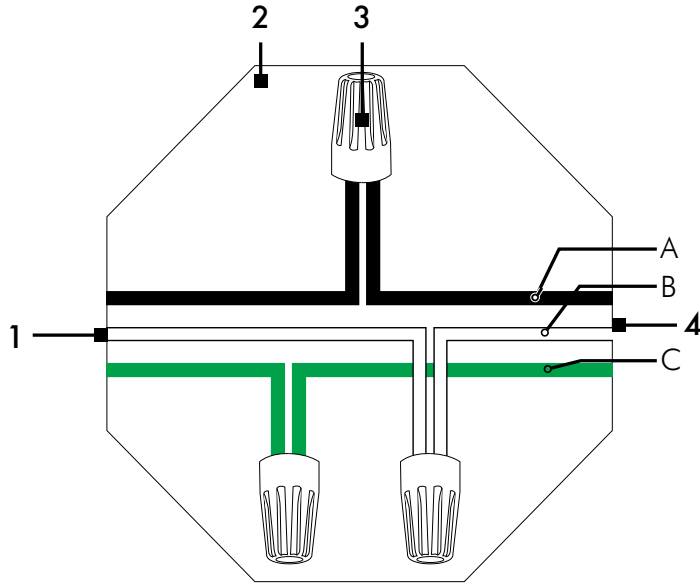

UL / cUL ELV Dimming

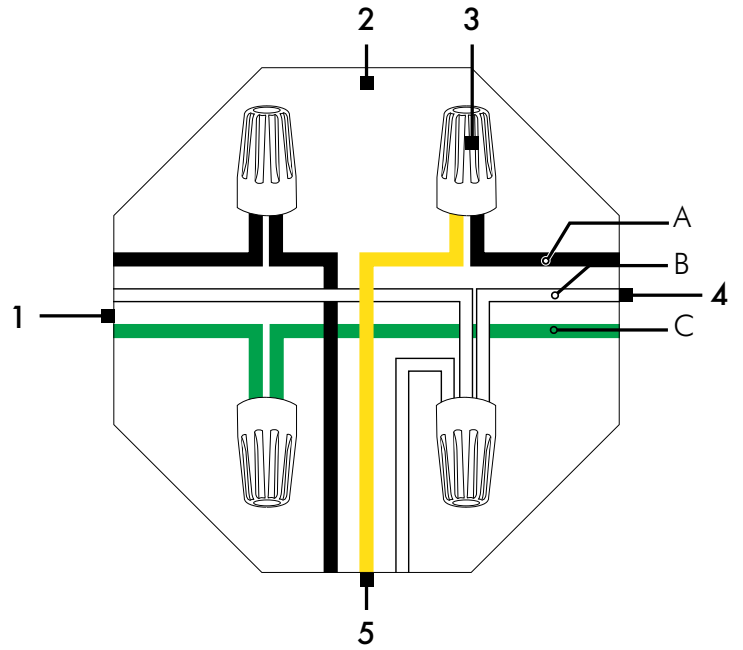

Wiring Legend


1	Power 100-277V AC
2	Junction Box
3	Wiring Nuts
4	3 Pin Leader Cable
5	ELV Dimmer

3 Pin Leader Cable


	UL/cUL
A	Live 100-277V AC Black
B	Neutral White
C	Ground Green

ELV Connectors


Female




Male



Angle Adjustment




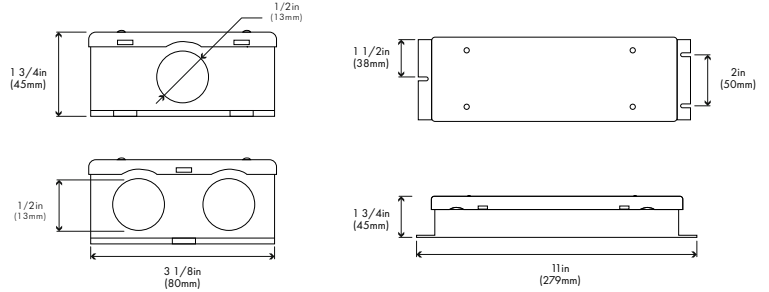

MODA BRIDGE 1

Converting 0-10V to ELV.

MODA BRIDGE 1 solves many installation issues. It accepts a standard 0-10V signal from most dimmers and dimming systems and internally converts this signal into a Electronic Low Voltage (ELV) signal. Thus enabling 0-10V control of an ELV fixture. It is optimized to perform precise smooth flicker free dimming down to 0%. Simple wiring with its integral 1/2in holes which accepts liquid tight or interior conduit connectors. Wire to any 100-277V 50/60 Hz feed. Power up to 840W of fixtures at 120V, 1600W at 230V, and 1900W at 277V. Fully potted enables the installer to mount this product virtually anywhere with its Wet Location IP65 rating. Fully protected from surge, short circuit, open circuit and over temperature. Power Input and data interface protected with High Grade Surge Protection. Designed and developed by MODA LIGHT, Las Vegas USA

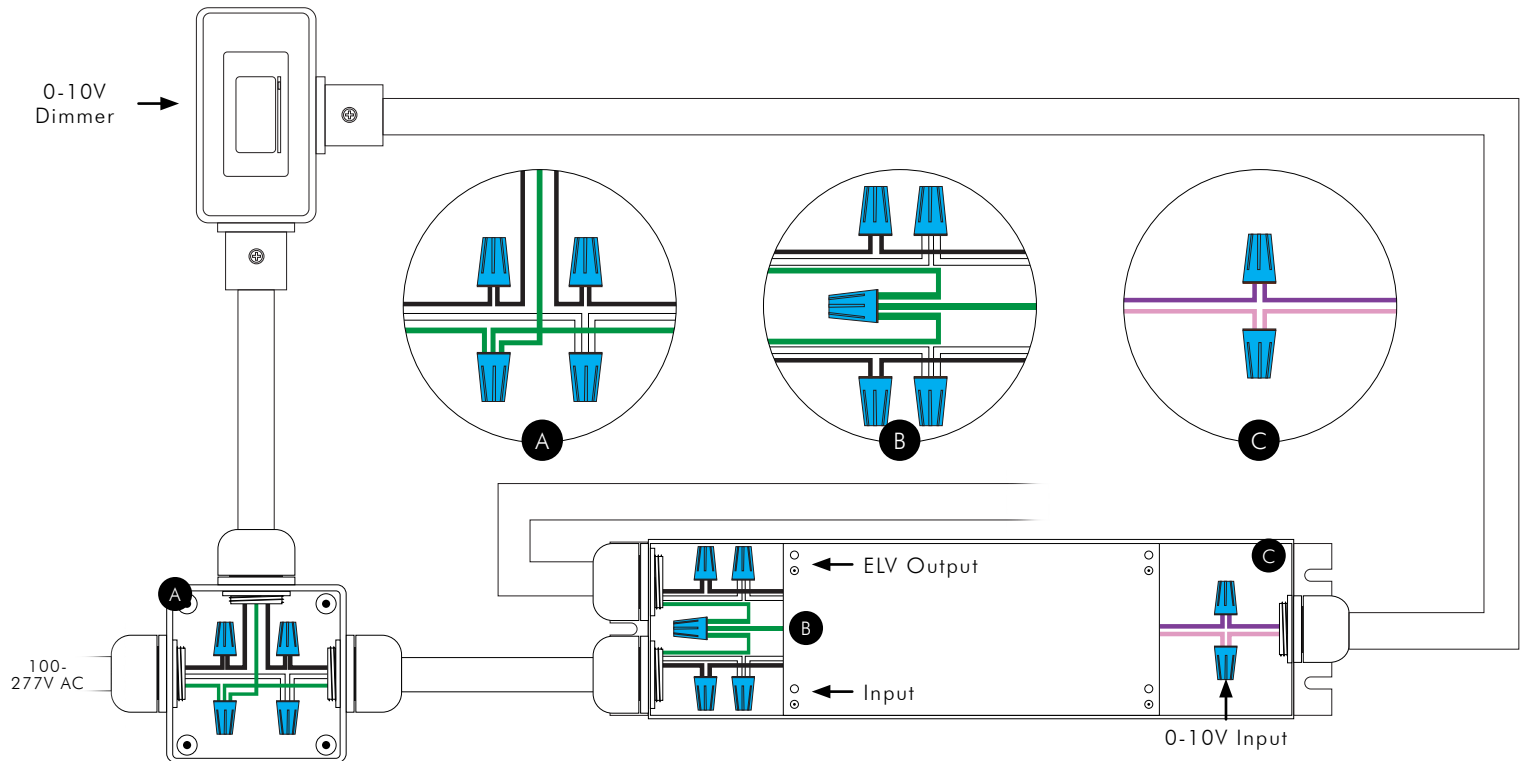

Input

	UL/cUL	
Live 100-277V AC		Black
Neutral		White
Ground		Green
0-10V / Data +		Purple
0-10V / Data -		Pink


Output

	UL/cUL	
Live 100-277V AC		Black
Neutral		White
Ground		Green


ELV Leader Cables

Moda Cove Exterior 3 Pin Leader Cables


	UL/cUL
Lengths	25ft and 50ft
Color	Black

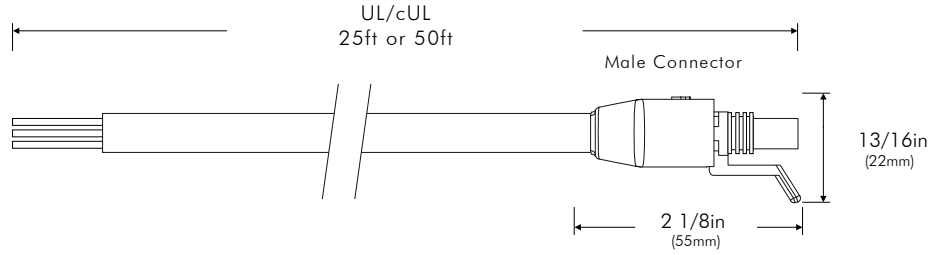

Connectors

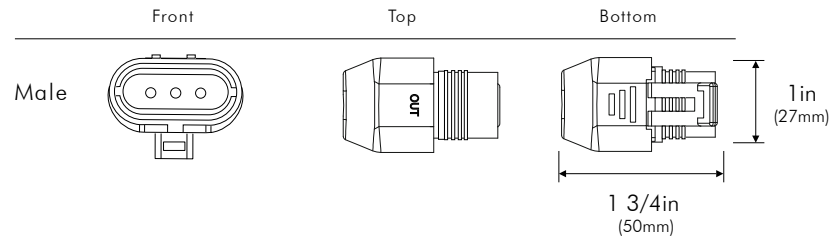

Pin Assignment




	UL/cUL
1 Live 100-277V	Black
2 Ground	Green
3 Neutral	White


ELV Jumper Cables

Moda Cove Exterior 3 Pin Jumper Cables


	UL/cUL
Lengths	1ft and 4ft
Color	Black

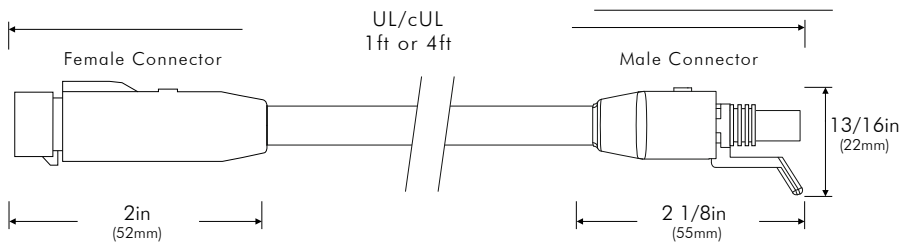


Connectors

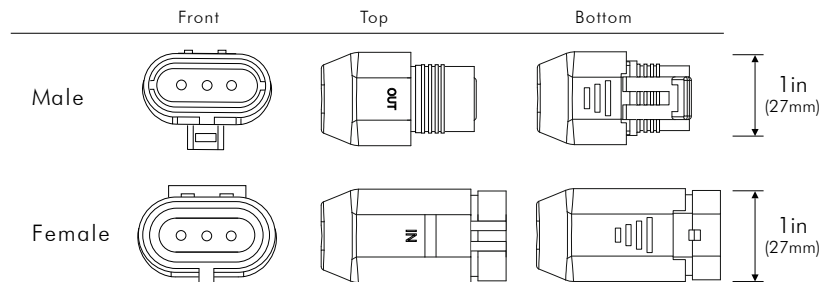

Pin Assignment



	UL/cUL
1 Live 100-277V	Black
2 Ground	Green
3 Neutral	White



	UL/cUL
1 Live 100-277V	Black
2 Ground	Green
3 Neutral	White



COMPLETE SKU SAMPLE: MGE-HO-S1-S-22H-1-6

A - FIXTURE & LOCATION

MGE — Moda Graze Exterior

B - LIGHT OUTPUT

LO — Low Output
 SO — Standard Output
 SO+ — Standard Output Plus
 HO — High Output
 HO+ — High Output Plus

C - SERIES NUMBER

S1 — Series 1

D - PRODUCT FINISH

S — Silver

E - FIXTURE & LOCATION

22H* — 2200K
 27H — 2700K
 3H — 3000K
 35H — 3500K
 4H — 4000K

*Not available for SO+ and HO

F - LENGTH

1 — 1FT
 4 — 4FT

G - OPTIC

6* — 6° x 6°
 10* — 10° x 10°
 25* — 25° x 25°
 40* — 40° x 40°
 140* — 10° x 40°
 360* — 30° x 60°
 365* — Forward Throw Asymmetric
 310** — 30° x 100°

*Available only in SO+ and HO

**Available only in LO, SO and HO+

modaLIGHT®

PRODUCT GUIDE

ACCESSORIES	DESCRIPTION	ORDERING SKU
Leader Cable US 3 Pin 25FT	Power to first fixture of run	MLCE-US-3PIN-B-25FT
Leader Cable US 3 Pin 50FT	Power to first fixture of run	MLCE-US-3PIN-B-50FT
Jumper Cable US 3 Pin 1FT	Connection between fixtures	MJCE-US-3PIN-B-1FT
Jumper Cable US 3 Pin 4FT	Connection between fixtures	MJCE-US-3PIN-B-4FT
Terminator 3 Pin	Must be fixed to last fixture for safety	MTE-3PIN-B
Exterior Bracket Lock	Holds fixture in place for vertical installation	MCGE-BL-G

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
MODA Bridge 1 2.0 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	MODA-BRIDGE-1-S2-S	250-0000