
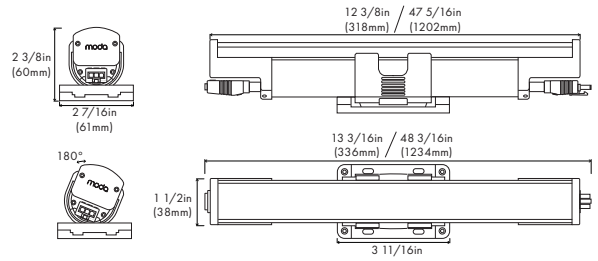


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____

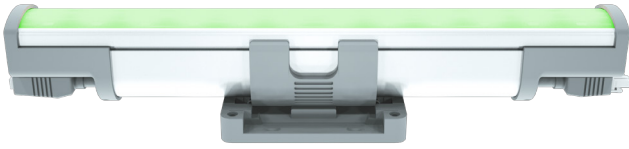

PHYSICAL

Dimensions	L: 12 3/8in (316mm) L: 47 5/16in (1202mm)	W: 2 3/8in (60mm) H: 2 7/16in (61mm)
Weight	12in: 1.0lbs (0.45kg) 48in: 3.1lbs (1.4kg)	
Applications	Cove, Accent, & Indirect General Illumination	
Construction	Pure Aluminum Body, Polycarbonate Mounting Bracket and Polycarbonate Optical Lens	
Ingress Protection	Dry/Damp Location IP44	
Thermal Management	Moda Aluminum Heat Sink	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)	
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)	
Humidity	0-95% Non Condensing	

SPECIFICATIONS

	Lumens		Efficacy	
	1FT	4FT	1FT	4FT
HO	492 - 948	1968 - 3792	49 - 94	49 - 94
HO+	240 - 1104	958 - 4420	24 - 110	24 - 110

POWER CONSUMPTION

120V - 277V AC

	1FT	4FT
HO	10W	40W
HO+	10W	40W

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
HO	60ft	60ft	120ft
HO+	60ft	60ft	120ft

OUTPUT

Colors	Yellow, Pink, Cyan, Violet, Turquoise, Ice Blue, Light Green, Golden Yellow, Dark Blue, and Dark Orange available
Beam Angle	120°
CRI	94-98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08
Dimming Range	100%-0% flicker-free

COLOR AVAILABILITY

COLOR	HO	HO+	COLOR	HO	HO+
Cyan		•	Golden Yellow		•
Ice Blue		•	Turquoise		•
Light Green		•	Pink		•
Yellow		•	Violet		•

• Available

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

	FIXTURE	ORDERING SKU
ELV HO+ 1FT	Moda Cove Interior High Output Plus Silver ELV Dimming Cyan 1FT	MCI-HOP-S1-S-C-1
	Moda Cove Interior High Output Plus Silver ELV Dimming Golden Yellow 1FT	MCI-HOP-S1-S-GY-1
	Moda Cove Interior High Output Plus Silver ELV Dimming Ice Blue 1FT	MCI-HOP-S1-S-IB-1
	Moda Cove Interior High Output Plus Silver ELV Dimming Light Green 1FT	MCI-HOP-S1-S-LG-1
	Moda Cove Interior High Output Plus Silver ELV Dimming Pink 1FT	MCI-HOP-S1-S-P-1
	Moda Cove Interior High Output Plus Silver ELV Dimming Turquoise 1FT	MCI-HOP-S1-S-TQ-1
	Moda Cove Interior High Output Plus Silver ELV Dimming Violet 1FT	MCI-HOP-S1-S-V-1
	Moda Cove Interior High Output Plus Silver ELV Dimming Yellow 1FT	MCI-HOP-S1-S-Y-1
ELV HO+ 4FT	Moda Cove Interior High Output Plus Silver ELV Dimming Cyan 4FT	MCI-HOP-S1-S-C-4
	Moda Cove Interior High Output Plus Silver ELV Dimming Golden Yellow 4FT	MCI-HOP-S1-S-GY-4
	Moda Cove Interior High Output Plus Silver ELV Dimming Ice Blue 4FT	MCI-HOP-S1-S-IB-4
	Moda Cove Interior High Output Plus Silver ELV Dimming Light Green 4FT	MCI-HOP-S1-S-LG-4
	Moda Cove Interior High Output Plus Silver ELV Dimming Pink 4FT	MCI-HOP-S1-S-P-4
	Moda Cove Interior High Output Plus Silver ELV Dimming Turquoise 4FT	MCI-HOP-S1-S-TQ-4
	Moda Cove Interior High Output Plus Silver ELV Dimming Violet 4FT	MCI-HOP-S1-S-V-4
	Moda Cove Interior High Output Plus Silver ELV Dimming Yellow 4FT	MCI-HOP-S1-S-Y-4

ACCESSORIES	DESCRIPTION	ORDERING SKU
Leader Cable US 3 Pin 10FT	Power to first fixture of run	MLCI-US-3PIN-G-10FT
Leader Cable US 3 Pin 25FT	Power to first fixture of run	MLCI-US-3PIN-G-25FT
Jumper Cable US 3 Pin 1FT	Connection between fixtures	MJCI-US-3PIN-G-1FT
Jumper Cable US 3 Pin 4FT	Connection between fixtures	MJCI-US-3PIN-G-4FT
Terminator 3 Pin	Must be fixed to last fixture for safety	MTI-3PIN-G
Interior Bracket Lock	Holds fixture in place for vertical installation	MCGI-BL-G

CONTROLS	DESCRIPTION	PART NUMBER	ORDERING SKU
MODA Bridge 1 2.0 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	MODA-BRIDGE-1-S2-S	250-0000