

modaLIGHT[®]

SPECIFICATION

PHAROS BPS

The Pharos BPS (Button Panel Station) is a versatile 8-button station with integrated button LEDs that works with any Pharos Controller. The stylish BPS is available in a range of finishes and there are two variants for compatibility with either US or UK back boxes. Install is easy and convenient as the BPS only requires a single Power-over-Ethernet (PoE) network connection.



CAPABILITIES

Buttons	8 high-reliability, tactile buttons with detection of press, held, repeat and release
LEDs	Each button has an individual white LED indicator with variable brightness and flash effect options
Infra-red	Learning IR allows any standard remote control to be used to activate button presses

INTERFACES

Ethernet	RJ45 socket for 10/100Base-TX Ethernet with Link/Data LEDs; Static IP or DHCP
-----------------	---

ORDER CODE & VARIANTS


BPS UK BB	Button Panel Station UK Black-on-Black (Magnetic Overlay)
BPS UK CC	Button Panel Station UK Cream-on-Cream (Magnetic Overlay)
BPS UK WW	Button Panel Station UK White-on-White (Magnetic Overlay)
BPS US BB	Button Panel Station US Black-on-Black (Magnetic Overlay)
BPS US CC	Button Panel Station US Cream-on-Cream (Magnetic Overlay)
BPS US WW	Button Panel Station US White-on-White (Magnetic Overlay)

Pharos Controller required


SPECIFICATION

Certifications	CE compliant, ETL/cETL listed
Power	PoE (IEEE802.3af, Class 1) 1.5W typical
Required	Any Pharos Controller
Addressing	By rotary selector switch
Temperature	0°C to 50°C (32°F to 122°F)
Physical	Flush-mounting wall panel with variants suitable for standard single-gang UK or US backboxes
Weight	0.3 kg (0.7 lbs)
Shipping	20 x 15 x 12 cm (8" x 6" x 5") 0.5 kg (1.1 lbs)
Recovery	Hardware watchdog and recessed reset button
Warranty	5 years

DIMENSIONS

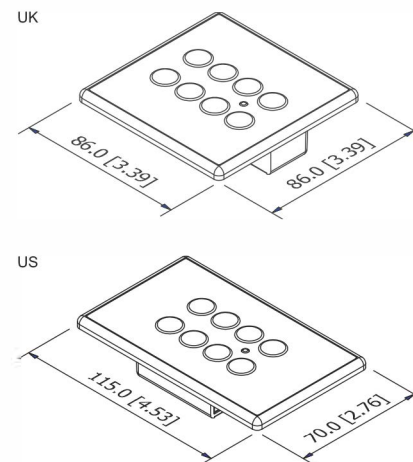

STANDARDS & CERTIFICATIONS



5
YEAR
WARRANTY

Project Name:

Notes: