

Class 2 specification grade 24V DC 60W LED driver. Universal input 100-277V AC for worldwide use. 0-10v dimmable. Durable steel construction matte black finish. Quality construction by MODA engineers ensures long life. Fully potted. Ergonomic design. Built-in active PFC function. Fully protected from Over Current, Short Circuit and Over Temperature. Cooling by free air convection. IP66. Tested by UL.



### **OUTPUT**

DC Voltage	24V
Rated Current	2.5A
Rated Power	60W
Efficiency (Typ.)	88.0%
Dimming	0 - 10V *10%-100%

### **INPUT**

Voltage Range	100 - 277V AC
Frequency Range	50 / 60 Hz
Power Factor	< 0.95
Input Current	0.60A at 120V AC / 0.26A at 277V AC

#### **PROTECTION**

Open Current	Yes
Short Circuit	Yes
Surge Protection	Yes
Over Temperature	TCase: Max 194° ( 90° C )
	Type: Shutdown Mode (Re-power on to recover)

# **STANDARDS & CERTIFICATIONS**

Safety Standards	UL8750, CSA C22.2 No. 107.1 CAN/CSA-C22.2 No. 250.13-12
RoHS	Compliant
Withstand Voltage	I/P - O/P: 2.00kv AC
Class	2
Warranty	5 Year Limited Warranty

### Project Name:

Notes:

### **PHYSICAL**


Dimensions	Length 9 2/5" (240mm) Width 1 7/10" (43mm) Height 1 3/10" (32mm)
Weight	1.3 lbs (590g)
Construction	Steel Construction, Fully Potted
Thermal Management	Free Air Convection

#### **ENVIRONMENT**

Location	Wet Location Rated IP66 *Driver and exposed wires must be housed in a wet location rated enclosure.
Operation Temp.	- 40° F ~ 167° F ( - 40° C ~ 75° C )
Operation Humidity	20% ~ 95% RH Non Condensing
Storage Temp.	- 4°F ~ 176°F ( - 20°C ~ 80°C )
Storage Humidity	10% ~ 90% RH

Note: With constant development of LED technology please refer to our website for current technical data  $\,$ 

## **DIMENSIONS**

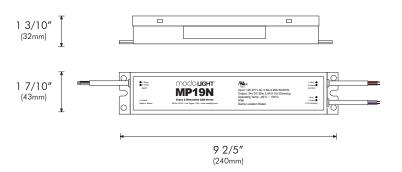

# **MODA TECHNOLOGY**

modadriver ™

# STANDARDS & CERTIFICATIONS















ORDERING SKU: MP19N