

Specification grade 24V DC 100W LED driver. Universal input 100-277V AC for worldwide use. 0-10V dimmable. Durable steel construction matte black finish. Quality construction by MODA engineers ensures long life. Fully potted. Ergonomic design. Builtin active PFC function. Fully protected from Over Current, Short Circuit and Over Temperature. Cooling by free air convection. IP66. Tested by UL.



#### OUTPUT

DC Voltage	24V
Rated Current	0.41A - 4.1A
Rated Power	100W
Efficiency (Typ.)	90.0%
Dimming	0 - 10V

#### **INPUT**

Voltage Range	100 - 277V AC
Frequency Range	50 / 60 Hz
Power Factor	< 0.95
Input Current	0.98A at 120V AC / 0.42A at 277V AC

## **PROTECTION**

Open Current	Yes
Short Circuit	Yes
Surge Protection	Yes
Over Temperature	TCase: Max 194° ( 90° C )
	Type: Shutdown Mode (Re-power on to recover)

#### **STANDARDS & CERTIFICATIONS**

Safety Standards	UL8750, CSA C22.2 No. 107.1 CAN/CSA-C22.2 No. 250.13-12
RoHS	Compliant
Class	2
Warranty	5 Year Limited Warranty

Project Name:

Notes:

#### **PHYSICAL**


Dimensions	Length 9 1/2" (241mm) Width 2 3/10" (58mm) Height 1 1/2" (37mm)
Weight	1.8 lbs (816g)
Construction	Steel Construction, Fully Potted
Thermal Management	Free Air Convection

#### **ENVIRONMENT**

Location	Wet Location Rated IP66 *Driver and exposed wires must be housed in enclosure.
Operation Temp.	- 40° F ~ 167° F ( - 40° C ~ 75° C )
Operation Humidity	0% ~ 100%
Storage Temp.	- 40° F ~ 176° F ( - 40° C ~ 80° C )
Storage Humidity	0% ~ 90% RH

Note: With constant development of LED technology please refer to our website for current technical data

# **DIMENSIONS**

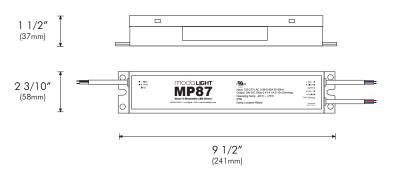

### **MODA TECHNOLOGY**

modadriver™

# **STANDARDS & CERTIFICATIONS**









